

PEARL®

NEEDLE SCALERS

MODEL PA4150NS / PA4160NSH

OWNER'S/OPERATOR'S MANUAL

Model PA4150NS



Model PA4160NSH



SERIAL NUMBER -

You should record the Serial Number of your polisher on this Owner's/Operator's Manual

Caution! Read Safety and General Instructions carefully before using the tool for the first time.



WARNING: This product can potentially expose you to chemicals that are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to: www.P65Warnings.ca.gov

REV. 1

Made in Japan

PEARL ABRASIVE CO. NEEDLE SCALERS

i. TABLE OF CONTENTS

ii.	GENERAL SAFETY RULES AND PRECAUTIONS	3
iii.	SILICA DUST WARNING	10
iv.	FEATURES	10
v.	SPECIFICATIONS	10
vi.	OPERATION PROCEDURES.....	11
vii.	SPECIFIC CAUTION FOR AIR SUPPLY	12
viii.	ABOUT AIR PRESSURE AND VOLUME	12
ix.	ABOUT SILENCE	13
x.	MAINTENANCE	13
xi.	REPLACEMENT PARTS LISTS	14-17
xii.	HOW TO ORDER PARTS	19
xiii.	CUSTOMER SERVICE	Back cover
	PEARL LIMITED WARRANTY	Back cover
	PEARL CONTACT INFO	Back cover

ii. GENERAL SAFETY RULES AND PRECAUTIONS

⚠ WARNING! *Read all instructions. As with all machinery there are certain hazards involved with operation and use of the machine. The following basic safety precautions should be followed at all times to reduce the risk of fire, electric shock and serious personal injury to you or others. Keep these important operating instructions with this product.*



1. Know your tool - read owner's/operator's manual carefully. Learn its applications and limitations as well as the specific potential hazards unique to this tool.



2. Keep guards in place - and in working order.



3. Remove wrenches - Form a habit of checking to see that adjusting wrenches are removed from tool before turning it "on".



4. Keep work area clean. Cluttered areas and benches invite accidents.



5. Keep children and visitors away. All children and visitors should be kept at a safe distance from work area.



6. Make workshop childproof with padlocks, master switches or by removing starter keys.

7. Do not force tool. It will do the job better and be safer at the rate for which it was designed.

8. Use right tool. Do not force tool or attachment to do a job for which it was not designed.

9. Wear proper apparel. Do not wear loose clothing, gloves, neckties, rings, bracelets or other jewelry that may get caught in moving parts. Non-slip footwear is recommended. Wear protective hair covering to contain long hair.

10. *Always use safety glasses.* Wear safety glasses (must comply with ANSI Z87.1) at all times. Everyday eyeglasses only have impact resistant lenses; they are not safety glasses. Use face or dust mask if cutting operation is dusty, and ear protectors



(plugs or muffs) during extended periods of operation.



11. Do not overreach. Keep proper footing and balance at all times.



12. Maintain tools in top condition. Keep tools sharp and clean for best and safest performance. Follow instructions for lubricating and changing accessories. Inspect tool cords periodically and if damaged, have repaired by authorized service facility.



13. Disconnect tools. When not in use, before servicing, and when changing accessories, such as blades, bits, cutters.



14. Avoid accidental starting. Make sure switch is in “off” position.



15. Use recommended accessories only. Consult the owner’s manual for recommended accessories. The use of improper accessories may cause risk of injury to persons.

16. Check Damaged Parts. Before further use of the tool, a guard or other part

that is damaged should be carefully checked to ensure that it will operate properly and perform it’s intended function. Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other conditions that may affect it’s operation. A guard or part that is damaged should be properly repaired or replaced.

17. Never leave tool running unattended. Turn power “off”. Do not leave tool until it comes to a complete stop.

18. Stay alert, be careful with what you are doing when operating an air tool. Do not use tool while tired or under the influence of drugs, alcohol or medication.

19. Do not operate tool while under the influence of drugs, alcohol or any medication.

20. Store idle tool. When not in use, tool should be stored in a dry and locked place, out of reach of children.

21. Do not use the tool for a

- purpose other than designated by the manual.
22. Follow ANSI Z87.1 or local/national standards for eye-wear and other personal protective equipment requirements. Everyday eyeglasses are not safety glasses.
 23. Exposure to certain chemicals in dust generated from workpiece and/or abrasive materials can result in lung damage and other physical injury. Your risk of exposure varies, depending on how often you do this type of work. To reduce your exposure to dust, work in a well-ventilated area and work with approved safety equipment designed to filter out microscopic particles.
 24. Do not overwork and have a rest before you get too tired.
 25. Always check rotation direction before use.
 26. Never place your hand or face near the rotating accessory
 27. Do not operate the tool continually at full throttle without a work load on the tool.
 28. Do not dismantle or modify the tool.
 29. Do not direct the tool towards bystanders and/or animals. Fragments of workpiece or of a broken accessory may fly away and cause injury. Keep bystanders out of work area.
 30. Do not abuse the hose. Never use the air hose for carrying. The tool can start suddenly and may cause injury. Keep the air hose away from sharp edges.
 31. Do not use damaged air hose. Damaged air hose increase the risk of accident.
 32. Never work near inflammable liquid or in a highly explosive area.
 33. Make sure that the tool is off before connecting to the air compressor.
 34. Always disconnect the tool from air supply before removing any accessory or maintenance work.
 35. Do not force tool. Use the correct tool for your application. The correct tool will do the job better and safer.
 36. If any physical hand/wrist discomfort is experienced, stop work promptly and seek medical attention. Hand, wrist and arm injury may result from repetitive

work, motion and overexposure to vibration. Take frequent rest and limit daily time of use.

37. Handle the tool with care. Dropping the tool on a ground, crashing it into objects any cause the tool to deform and crack.
38. Use only an air compressor. Use of high pressure gas other than an air such as an oxygen and acetylene will increase the risk of explosion.
39. Pneumatic tool's exhaust air contains oil and contaminated moisture. Make sure it is not directed towards you or anyone within the work area.
40. When working at height, make sure that nobody is underneath, and ensure also that the tool is kept on a stable platform.
41. Do not press the tool too hard against the workpiece. It is not only inefficient but also may cause damages to the tool.
42. Never lay the tool until the accessory has come to a complete stop.
43. Do not carry the tool by the air hose, and do not pull it to disconnect at the same time.
44. Do not cover or block an exhaust.

Blocked exhaust obstructs the tool from working properly. Also, do not direct exhaust air towards bystanders and/or animals.

45. Dress properly.
46. Immediately stop operating the tool if you feel the tool is not working correctly. If damaged, have the tool serviced.
47. Do not use tooling that could be hazardous if it becomes wet. (i.e. grinding stones)
48. Never place hand or face near a moving accessory.
49. Use only genuine Pearl replacement parts for repairs.
50. Always turn it off and disconnect from air compressor before installing and removing accessories, before adjusting or when making repairs.
51. Never use damaged accessories.
52. Wear personal protective equipment such as safety glasses that conforms to ANSI/ISEA Z87.1, and ear protection that conforms to ANSI/ISEA S12.6.
53. Always securely clamp and support work piece.
54. Do not use damaged air hose.
55. Keep tools clean and lubricated.

56. Always disconnect tool when not in use, especially when changing tools.
57. Inspect before using, check alignment of moving parts and breakage or improper mounting.
7. Never use solvents or other harsh chemicals to clean the non-metallic parts of the tool.
8. Before use each day place 2-3 drop of pneumatic tool oil in the air inlet of the tool. Run tool for 2-3 seconds to allow moving parts to become lubricated. Lubricating the tool before and during work is not needed. Excessive oil will turn into a tar-like substance inside the tool, causing the vanes to stick in the rotor and slow the tool down.

SPECIFIC CAUTION FOR MAINTENANCE

1. Immediately stop operating the tool whenever you feel that the tool is not working properly. If damaged, have the tool serviced.
2. Use appropriate pressure. Excessively high pressure will increase the number of revolutions or strokes causing potential failure and accidental injury.
3. Use only identical replacement parts when servicing.
4. Do not store unused accessories and tools in an area where temperature changes a lot and/or under the direct sunlight. Store them in a dry area and out of reach of children.
5. Inspect tool before use; check if parts and accessories are free from damage.
6. Do not use damaged accessory.
9. At the end of the shift disconnect air and water line and hang the tool upside down to allow any water to drain from the tool.
10. Clean coupler fittings on air hoses so that a motor will not ingest powder dust and sand. Also, use clean water from a tap.
11. If you notice deformation of a backing pad in any way, discontinue its use and replace the backing pad.
12. Do not submerge the tool in water. This will expose the inner moving parts to moisture that will shorten the life expectancy.
13. Do not leave accessories attached to the threads of the spindle. This can result in

damage to the spindle or accessory. Excessive force to the spindle trying to remove corroded accessories could damage the gears and bearings.

14. If you notice any abnormal noise or vibration when operating the product, immediately discontinue its use. Inspect and replace any damaged parts. If abnormal noise or smell persist, return the machine for service or repair.

15. For further operational and handling information or for replacement of parts and components, please contact the agent from whom you purchased the tool.



WARNING! CALIFORNIA PROPOSITION 65: *Sawing and drilling generates dust. Excessive airborne particles may cause irritation to eyes, skin and respiratory tract. To avoid breathing impairment always employ dust controls and protection suitable to the material being saw or drilled in accordance with OSHA (29 CFR Part 1910.1). Diamond blades improperly used are dangerous. Comply with ANSI Safety Code B7.1 and OSHA covering speed, safety guards, flanges, mounting procedures, general operating rules, handling, storage and general machine condition.*



KEEP GUARD IN PLACE



DIAMOND BLADE



BLADE CUTTING DEPTH



ELECTRIC SWITCH OFF



ELECTRIC SWITCH ON



ELECTRICAL HAZARD



REMOVE TOOLS



PAY EXTREME ATTENTION



REPAIRS TO BE DONE



MACHINE HAZARD



FLAMMABLE



READ INSTRUCTIONS CAREFULLY



WARNING



FRAGILE



KEEP DRY



DO NOT STEP ON



WEAR HEARING PROTECTION



WEAR EYE PROTECTION



WEAR BREATHING PROTECTION



WEAR HARD HAT



WEAR PROTECTIVE CLOTHING



WEAR SAFETY SHOES



WELL VENTILATED



NO NON-WORKING PERSONNEL

iii. SILICA DUST WARNING

Grinding/cutting/drilling of tile, masonry, concrete, metal and other materials with silica in their composition may give off dust or mists containing crystalline silica. Silica is a basic component of sand, quartz, brick clay, granite and numerous other minerals and rocks. Repeated and/or substantial inhalation of airborne crystalline silica can cause serious or fatal respiratory diseases, including silicosis. In addition, California and some other authorities have listed respirable crystalline silica as a substance known to cause cancer. When cutting such materials, always follow respiratory precautions.

Use appropriate NIOSH-approved respiratory protection where dust hazard may occur. Paper masks or surgical masks without NIOSH approval number are not recommended because they do little to protect the worker. For more information about respirator programs, including what respirators have received NIOSH approval as safe and effective, please visit the NIOSH website at <http://www.cdc.gov/niosh/topics/respirators>

Observe OSHA regulations for respirator use (29 C.F.R. §1910.134).

Visit <http://www.osha.gov> for more information.

iv. FEATURES



- Professional design for continuous production applications.
- Strong aluminum housing withstands tough operating conditions
- Sealed bearings provide long life and smooth operation
- Air control is conveniently located and easy to use
- Rear air vent exhaust protector
- Long-lasting
- Great for cleaning and removing paint, rust, dirt, or mill scale.
- 90-day limited warranty
- Made in Japan

v. SPECIFICATIONS

	PA415ONS	PA416ONSH
Stroke Length	Max 0.67 in	Max 0.67 in
Free Blow Speed	3,500 spm	3,300 bpm
Weight	4.53 lbs	4.83 lbs
Air Consumption	7.8 CFM	7.8 CFM
Avg. Air Consumption	1.3 CFM	1.3 CFM

vi. OPERATION PROCEDURES

1. Connect the coupler to the (1) air inlet on the rear side of tool.

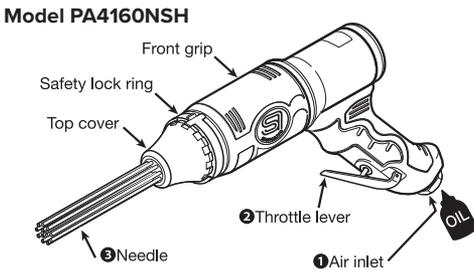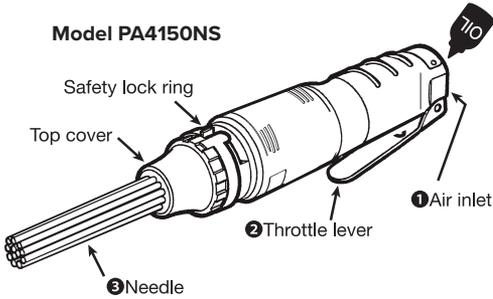


2. Pour approx. 0.5cc (2 to 3 drops) of the oil through the coupler. Connect it to the air hose, and run for 3 to 5 seconds to circulate the oil.
3. Some rebounds will occur during operation. Firmly retain the tool in both hands, slowly pull the throttle lever 8, and start the operation.
4. Release the throttle lever to stop the operation.

HOW TO REPLACE A NEEDLE




WARNING For replacement of the needle, be sure to remove the air hose.




1. First, unlock the safety lock claw locked in the top cover groove, and expand it.



2. Remove the safety lock ring from the housing.




3. Next, rotate and remove the top cover. Then, both the needle and needle cover can be together.



4. If replaced, set and lock the claw of the safety lock ring to the groove of top cover.

vii. SPECIFIC CAUTION FOR AIR SUPPLY

1. Use a clean lubricated air supply that will give a measured pressure at the tool of 90 PSI/6 bar (0.6 MPa)
2. Air pressure for this tool **MUST NOT** exceed 90 PSI/6 bar (0.6 MPa); excessively high air pressure will increase the number of revolutions causing not only potential failure or breakage but could also lead to an unexpected accident or injury.
3. Equip the air compressor with a replaceable filter that can be easily cleaned.
4. Use safety shuttle valves so air flow can be stopped in case of a line break.
5. Use anti-whip devices across hose couplings to prevent hose from whipping in the event of hose failure or coupling disconnect.
6. Regularly clean the tool's air vents.
7. Connect the tool to the air supply as shown below.

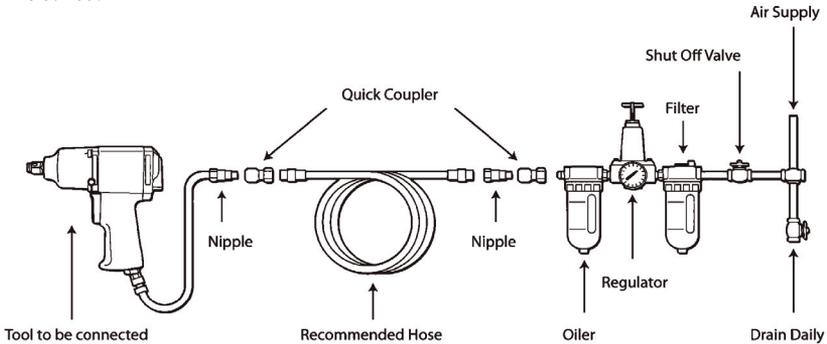

viii. ABOUT AIR PRESSURE AND VOLUME

1. The manufacturer specification on the tool is 5,000 RPM at 80-90 PSI. Pressure over 90 PSI exceeds the max speed rating for the rotor bearings that could potentially cause them to overheat and lock.
2. The air consumption of this grinder is very important. This tool requires 16 CFM (cubic feet per minute) for the tool to run at a constant speed. Each additional tool that is attached to an air compressor will require 16 CFM.

ix. ABOUT SILENCE

To comply with OSHA code 1926.52 Noise exposure Standard, this grinder comes fitted with an internal silencer. When operated within factory specifications (80-90 PSI @ 16 CFM) the silencer brings the noise to less than 84 db. The silencer also provides back pressure to help assure that you are getting a constant RPM level.

x. MAINTENANCE

- Use 3-4 drops of spindle/machine oil in the air intake valve. The grinder must be oiled daily.



Grease gears as needed using a multi-purpose EP lithium grease or moly EP lithium grease. DO NOT use oil.


- During operation, lubricate the air tool oil, if necessary. Lubricate a few drops of oil from the air inlet, and operate it for a few seconds so as for oil to diffusing into the whole housing.
- After operations, air-blow moisture attached to the machine body, and cleanly wipe off the dirty moisture. And lubricate a few drops of air tool oil from the air inlet. After a few seconds operations, store the tool in dry place.
- Keep the hose attached port clean so as to prevent dust to enter from the air inlet into the housing.
- Use the pad and polishing materials specific and adequate to this machine.
- In order to replace or install the pad and polishing material and other attachments, be sure to remove the air hose.
- Be sure to use the dry and clean compressed air.
- Don't use the tool in pressure exceeding air pressure 0.63Mpa.
- The air tool is precious machine. Don't throw, drop or give a strong shock thereto, which will cause damage to the machine.
- Avoid using the tool beyond the usage, and forced operations exceeding the performance.
- Its irregular noise or vibration should occur, or tool performance is deteriorated, immediately stop the operation. Check if any failure such as a breakage is found in attachments or the machine. If troubles are not resolved, though the attachment has been replaced or lubricated, contact to the purchase shop.

WARNING!

- Make sure to install the handle and the pad so as not too loosen.

xi. REPLACEMENT PARTS LIST

Model PA4150NS

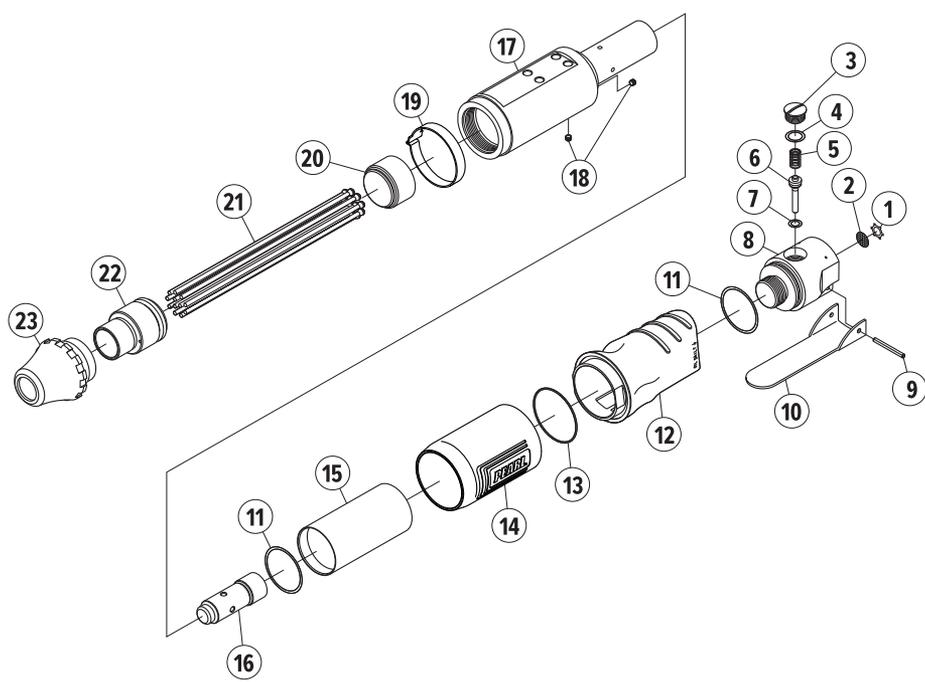


xi. REPLACEMENT PARTS LIST

Model PA4150NS

	PART NAME	QTY.	PT NUMBER
1	Retainer	1	889718
2	Screen	1	889719
3	Valve Screw	1	889720
4	O-Ring	1	889721
5	Valve Spring	1	889722
6	Valve Stem	1	889723
7	O-Ring	1	889724
8	Valve Body incl. Valve Bush(230-7)	1	889725
9	Roll Pin(3φ-30mm)	1	889726
10	Throttle Lever	1	889727
11	O-Ring	2	889728
12	Rear Grip	1	889729
13	O-ring	1	889730
14	Front Grip	1	889731
15	Sleeve	1	889732
16	Piston	1	889733
17	Cylinder incl. Screws(ROM40---30 x 2)	1	889734
18	Set Screw	2	889735
19	Safety Lock	1	889736
20	Anvil	1	889737
21	Needle φ3mm x 180mm	12	889738
22	Needle Holder for φ3mm Needle	1	889739
23	Top Cover	1	889740

xi. REPLACEMENT PARTS LIST

Model PA4160NSH

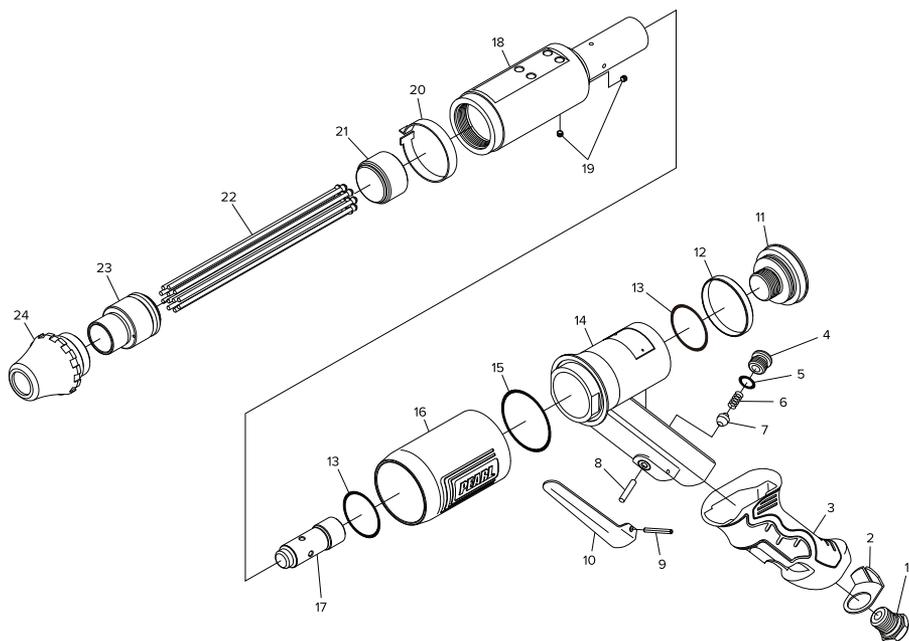

xi. REPLACEMENT PARTS LIST

Model PA4160NSH

	PART NAME	QTY.	PT NUMBER
1	Inlet Bushing (incl. Screen & Retainer)	1	889741
2	Cover Retainer	1	889742
3	Grip Cover	1	889743
4	Valve Screw	1	889744
5	O-Ring	1	889745
6	Valve Spring	1	889746
7	Valve	1	889747
8	Valve Pin	1	889748
9	Roll Pin(3φ-24mm)	1	889749
10	Trottle Lever	1	889750
11	End Cap	1	889751
12	End Cap Ring	1	889752
13	O-Ring	2	889753
14	Motor Housing	1	889754
15	O-ring	1	889730
16	Front Grip	1	889731
17	Piston	1	889733
18	Cylinder incl. Screws(ROM40---30 x 2)	1	889734
19	Set Screw	2	889735
20	Safety Lock	1	889736
21	Anvil	1	889737
22	Needle φ3mm x 180mm	12	889738
23	Needle Holder for φ3mm Needle	1	889739
24	Top Cover	1	889740

xii. HOW TO ORDER PARTS

Please have the following information ready before calling: Model Number and Part Description

For warranty purpose, please have the following ready: Serial Number, date of purchased and where.

All parts listed may be ordered from your Local warehouses. If the part is not stocked locally, call our Corporate office and ask for our Customer Service Department. For Technical Support call 1-800-969-5561. In Canada, call 1-800-387-0008. There is a \$25.00 minimum order.

Return Policy: Return goods for credit or exchange on the basis of the following terms: (1) They must be current products; (2) Items returned for replacement or refund should be in original cartons and must be accompanied by a packing slip with the following information: Returned Goods Authorization

(RGA) number obtainable from Customer Service Department • List of items returned • Reason(s) for return(s) • Copy of original invoice(s); (3) Freight charges must be assumed by sender; (4) Returning goods are subject to a 15% handling charge to cover our cost of repacking and restocking. All Prices are subject to change without notice.

Disclaimer: Pearl Abrasive Co. reserves the right to make changes or improvements on its products without incurring an additional obligation including any obligation to make corresponding changes or improvements to products previously manufactured or sold. Pearl reserves the right to discontinue products at any time without notice.

All illustrations displayed in this manual are the property of Pearl Abrasive Co. and shall not be duplicated or reproduced without the express written consent of Pearl Abrasive Co.

xiii. CUSTOMER SERVICE

After Sale Service. All customer service (technical questions, re-order of parts, etc.) will be provided by our company. All spare parts for after sales service will be stocked and shipped from our warehouse. If requested, we may arrange for our sales representatives to hold a training class for product knowledge at dealer's location.

PEARL LIMITED WARRANTY

Every PEARL tool is thoroughly inspected and tested before leaving the factory. It is warranted to be free of defects in materials and workmanship for a period of **1 YEAR** from the date of original purchase. Pearl will repair or (at our opinion) replace a product, or part thereof, found by PEARL to be defective, provided the defective product is returned to PEARL, freight pre-paid, with proof of purchase.

RGA NUMBER IS REQUIRED. Prior to the return of any product or part, a Return Goods Authorization number must be obtained from PEARL by fax 866-515-7569 or calling 800-969-5561. The owner's name, address, phone number, as well as the serial number of the product, proof of purchase, and a brief statement detailing the nature of the claimed defect, are required for authorization.

This Warranty does not apply where:

- Repairs have been made or attempted by others
- Repairs are required because of normal wear and tear
- The tool has been abused, misused or improperly maintained
- Alterations have been made to the tool
- The product is used in a manner or with a blade not recommended by the manufacturer

In no event shall Pearl be liable for any indirect, incidental or consequential damages from the sale or use of the equipment. This disclaimer applies both during and after the term of warranty.

Pearl disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose", after the one year term of this warranty.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

All parts replaced under warranty will be considered as part of the original product and any warranty on these parts will expire coincidentally with the original product warranty.

This warranty supersedes all previous PEARL's product warranties.

EXCLUSION: Water pump and motor warranty is through the original equipment manufacturer.

PEARL®

CORPORATE OFFICE:

GEORGIA • USA

455 SATELLITE BOULEVARD, SUWANEE, GA 30024

PH 800-969-5561

ONTARIO • CANADA

375-2 PIDO ROAD, PETERBOROUGH, ONTARIO K9J-6X7

PH 800-387-0008

www.pearlabrasive.com