


PEARL®



HEXPIN® FLOOR PREPARATION SYSTEM

PEARL HEX1CHIP CARBIDE HEXPIN® WITH SUPERCLUTCH™ - #HEX17CBDCLT

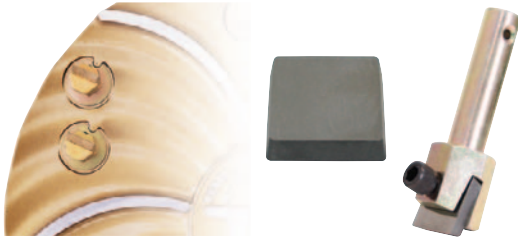

Designed and fitted with a replaceable, four sided, abrasion resistant, carbide insert. Use for removing thinset, mastics, glue, rubber or foam backed carpet residue, dirt buildup, ice and paint.


HEX1CARB - Carbide holder w/ #1 chip and screw (complete)
HEX1CHIP - #1 replacement carbide chip

SUPERCLUTCH™

Protects operator from injury, protects buffer from damage and keeps buffer coupler from breaking.

Simply turn off buffer and restart - less downtime.

Easy manual disengagement.

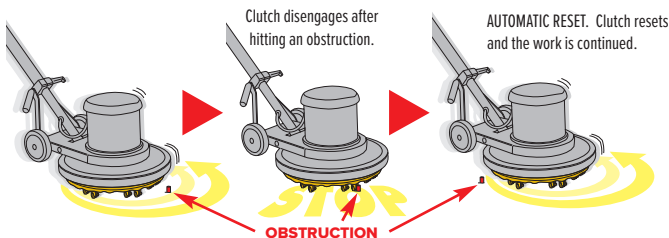


PEARL TURBO-CUT™ HEXPIN® - #HEX1FTC

Includes: FSP4516, FPD50, HX1FTCHL, HX1FTCNT & HX1FTCSC



Specially engineered for coating removal where abrasive grains are more effective than customary scraping methods. Suited for light scarification of coated surfaces, removal of urethane and rubberized coatings, sealers and light rust from metal surfaces.


PEARL DIAMOND SEGMENTED PADS - #HEX1764CLT

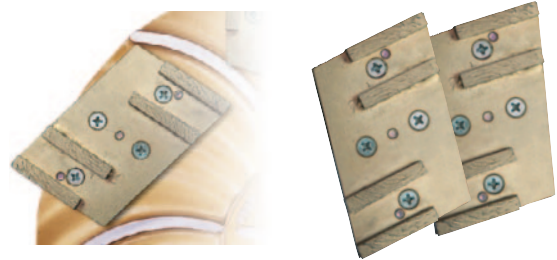

20% MORE GRINDING SURFACE AREA THAN THE COMPETITION!


Pearl's diamond segmented pads are made with an overall larger grinding/ sanding area which increases production. When attached to the 15" Hexplate™, the new and improved Diamond Segmented Pads extend past the edge of the plate allowing the operator to grind or sand right up to the edge of the wall.

- Use with your standard Hexplates
- Faster and more aggressive grinding
- Wide diamond segments mean longer life
- Easily removes trowel marks
- Smooths rough finishes
- Provides texture to slippery surfaces
- Prepares concrete surfaces for coatings
- Removes sealers and bond breaker coatings




HEX4SEG-MFD - Complete pin holder with diamond pad
HEX4PAD-MFD - Pad only, 4 segments - incl. nuts & washers

PEARL 16" DOUBLE-SIDED TUNGSTEN CARBIDE SANDING DISC - #CCD016P

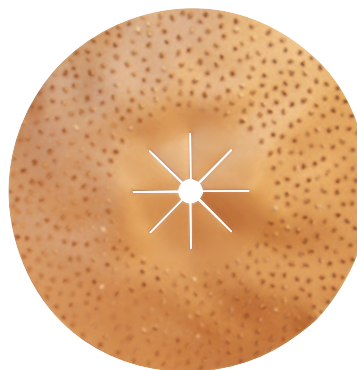

Excellent for removal of
paint, carpet adhesive,
epoxy and more!



Designed to remove paint, epoxy, thin-set, mastic, carpet padding and much more from concrete surfaces. It is engineered with 8-grit tungsten carbide chips which can be cleaned and used many times. Pearl's tungsten carbide sanding disc is ideal for use on Pearl's Sanding Disc attachment and with any 17" floor buffer.

HEXPIN® APPLICATION CHART

SURFACE	CONDITION	JOB	SCRAPE/GRIND PADS	DIAMOND EZ PADS	DIAMOND PADS
CONCRETE	Cured	Sanding		✳	✳
		Polishing		✳	
PAINT	Stripe Line	Removal	✳	✳	
		Cleanup		✳	✳
	Floor Paint	Removal	✳	✳	
		Cleanup		✳	✳
	Old Paint	Removal	✳	✳	
		Cleanup		✳	✳
ADHESIVES and COATINGS	Thinset	Removal	✳		
		Cleanup	✳	✳	✳
	Carpet Mastic	Removal	✳		
		Cleanup		✳	✳
	Rubber Carpet Backing	Removal	✳		
		Cleanup		✳	✳
	Epoxy	Removal		✳	✳
		Scarification			✳
	Urethane	Cleanup		✳	
		Removal	✳		✳
	Fiberglass	Scarification			✳
		Cleanup		✳	
STONE FLOOR MAINTENANCE	Terrazzo	Polishing			
	Marble	Polishing			
WOOD	Sanding	Sanding		✳	
	Paint Removal	Paint Removal		✳	
	Coating Removal	Coating Removal		✳	
GENERAL PURPOSE	Ice	Removal	✳		
	Wax	Remove/Apply			
	Rust on Steel	Cleanup			
	Dirt and Grease	Removal	✳		✳

COMMENTS

CONCRETE

- For increased performance, add weight.

PAINT

- For increased performance, add weight.
- Fine sand may be added to enhance paint removal.

ADHESIVES AND COATINGS

- For increased performance add weight.
- Fine sand may be added to enhance adhesive coating removal with Carbide and Diamond Hexpin®.
- Cleanup applications should only be done when most of the mastic has been removed with Carbide Hexpins®. Concrete must be exposed before moving to Diamond or Turbo-Cut™ Hexpins® for cleanup.

INDIVIDUAL JOB REQUIREMENTS MAY VARY.

TURBO MAX HD

PEARL 17" PRO BUFFER - #HEX1BFRHD

1-1/2 HP Induction, Dual Capacitor AC Motor and Heavy Duty Planetary Head
1.5 HP Open Drip Proof Motor (ODP) 110/115v


14.4 amps

Dual metal switch levers, left or right hand operation



- Triple planetary steel gears - 175 rpm
- All steel and stainless steel construction
- Optimal weight delivers the right resistance against the floor to get the job done better and faster
- Extremely durable and convenient handle adjustment mechanism is foot operated
- Long 50 ft. heavy duty (14-3) cord with durable spring steel strain relief
- 5" non-marking wheels
- Non-marking PVC bumper prevents marking furniture or walls
- Assembled in the U.S.A.
- 1-year limited warranty

PEARL 16" SANDING PLATE - #BUFSPL16

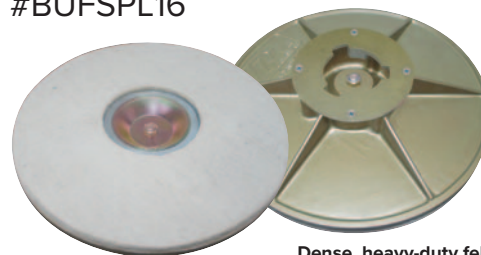

Dense, heavy-duty felt.

Heavy duty aluminum plate. 3/8" thick felt pad. Durable metal center casting. For use on 17"-18" floor buffer machines. It includes our HEX1CLP clutch plate to fit most floor machines.

HEXPIN® FLOOR PREPARATION SYSTEM

PEARL

USA (800) 969-5561
Canada (800) 387-0008
PearlAbrasive.com